

Strictly Confidential: (For Internal and Restricted use only)
Senior School Certificate Examination-2020
Marking Scheme – PHYSICS THEORY (042)
(55/1/1)

General Instructions: -

1. You are aware that evaluation is the most important process in the actual and correct assessment of the candidates. A small mistake in evaluation may lead to serious problems which may affect the future of the candidates, education system and teaching profession. To avoid mistakes, it is requested that before starting evaluation, you must read and understand the spot evaluation guidelines carefully. **Evaluation is a 10-12 days mission for all of us. Hence, it is necessary that you put in your best efforts in this process.**
2. Evaluation is to be done as per instructions provided in the Marking Scheme. It should not be done according to one's own interpretation or any other consideration. Marking Scheme should be strictly adhered to and religiously followed. **However, while evaluating, answers which are based on latest information or knowledge and/or are innovative, they may be assessed for their correctness otherwise and marks be awarded to them.**
3. The Head-Examiner must go through the first five answer books evaluated by each evaluator on the first day, to ensure that evaluation has been carried out as per the instructions given in the Marking Scheme. The remaining answer books meant for evaluation shall be given only after ensuring that there is no significant variation in the marking of individual evaluators.
4. Evaluators will mark(✓) wherever answer is correct. For wrong answer 'X' be marked. Evaluators will not put right kind of mark while evaluating which gives an impression that answer is correct and no marks are awarded. **This is most common mistake which evaluators are committing.**
5. If a question has parts, please award marks on the right-hand side for each part. Marks awarded for different parts of the question should then be totaled up and written in the left-hand margin and encircled. This may be followed strictly.
6. If a question does not have any parts, marks must be awarded in the left-hand margin and encircled. This may also be followed strictly.
7. If a student has attempted an extra question, answer of the question deserving more marks should be retained and the other answer scored out.
8. No marks to be deducted for the cumulative effect of an error. It should be penalized only once.
9. A full scale of marks **0-70** has to be used. Please do not hesitate to award full marks if the answer deserves it.
10. Every examiner has to necessarily do evaluation work for full working hours i.e. 8 hours every day and evaluate 20 answer books per day in main subjects and 25 answer books per day in other subjects (Details are given in Spot Guidelines).
11. Ensure that you do not make the following common types of errors committed by the Examiner in the past:-
 - Leaving answer or part thereof unassessed in an answer book.
 - Giving more marks for an answer than assigned to it.
 - Wrong totaling of marks awarded on a reply.
 - Wrong transfer of marks from the inside pages of the answer book to the title page.
 - Wrong question wise totaling on the title page.
 - Wrong totaling of marks of the two columns on the title page.
 - Wrong grand total.

- Marks in words and figures not tallying.
- Wrong transfer of marks from the answer book to online award list.
- Answers marked as correct, but marks not awarded. (Ensure that the right tick mark is correctly and clearly indicated. It should merely be a line. Same is with the X for incorrect answer.)
- Half or a part of answer marked correct and the rest as wrong, but no marks awarded.

12. While evaluating the answer books if the answer is found to be totally incorrect, it should be marked as cross (X) and awarded zero (0)Marks.

13. Any unassessed portion, non-carrying over of marks to the title page, or totaling error detected by the candidate shall damage the prestige of all the personnel engaged in the evaluation work as also of the Board. Hence, in order to uphold the prestige of all concerned, it is again reiterated that the instructions be followed meticulously and judiciously.

14. The Examiners should acquaint themselves with the guidelines given in the Guidelines for spot Evaluation before starting the actual evaluation.

15. Every Examiner shall also ensure that all the answers are evaluated, marks carried over to the title page, correctly totaled and written in figures and words.

16. The Board permits candidates to obtain photocopy of the Answer Book on request in an RTI application and also separately as a part of the re-evaluation process on payment of the processing charges.


MARKING SCHEME: PHYSICS**QUESTION PAPER CODE: 55/1/1**

Q.No.	Value Points/Expected Answer	Marks	Total Marks
SECTION A			
1	(A) no net charge is enclosed by the surface	1	1
2	(C) $-qLE$	1	1
3	(C) No current flows in the potentiometer wire at balance	1	1
4	(B) 3:2	1	1
5	(D) material of the turns of the coil	1	1
6	(A) increases the resolving power of telescope	1	1
7	(A) 1.47	1	1
8	(A) red colour	1	1
9	(D) The stability of atom was established by the model	1	1
10	(C) 1:3	1	1
11	0.15G	1	1
12	Eddy	1	1
13	Four times	1	1
14	Integral OR Nucleons	1	1
15	$\sqrt{3}$	1	1
16	$\oint B \cdot dl = \mu_0(i_c + i_d)$	1	1
17	Decreases or reduce	1	1
18	4.8 fermi OR $\frac{1}{1836}$	1	1
19	M ₂	1	1
20	Si & Ge cannot be used for fabrication of visible LED because their energy gap is less 1.8eV	1	1

SECTION B

21


- | | |
|--|--------|
| (a) Principle | 1 mark |
| (b) Circuit diagram for determining unknown resistance of meter bridge | 1 mark |



Meter bridge works on the principle of a balanced wheatstone bridge.

$$\frac{R_1}{R_2} = \frac{R_3}{R_4} \text{ at null point when } I_g=0$$

(unknown)

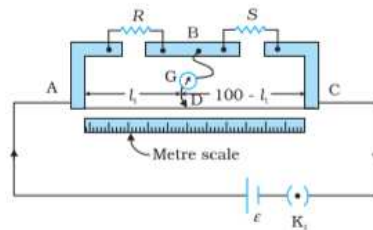

1/2

1/2

1

2

22

- | | |
|---|----------|
| Formula for parallel plate | 1/2 mark |
| Calculation of effective capacitance of the combination | 1 mark |
| Relation K, K ₁ and K ₂ | 1/2 mark |

$$C_1 = \frac{k\epsilon_0 A}{d}$$

Capacitor are connected in series

$$C_2 = \frac{C' C''}{C' + C''} = \left(\frac{2K_1 K_2}{K_1 + K_2} \right) \frac{\epsilon_0 A}{d}$$

$$C_1 = C_2$$


$$K = \frac{2K_1 K_2}{K_1 + K_2}$$


1/2

1

1/2

2

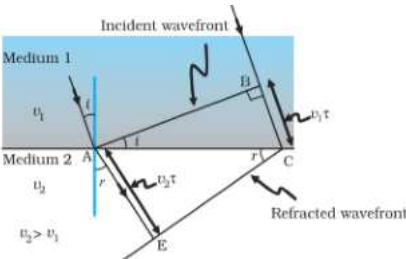23	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Definition of half life 1 mark</p> <p>Determination of ratio R_1 and R_2 1 mark</p> </div> <p>The time interval in which the number of radioactive nuclei reduced / disintegrated to half of initial value</p> <p>Let R_1 and R_2 be their activities then</p> $R_1 = \lambda_1 N_1$ $R_2 = \lambda_2 N_2$ $\frac{R_1}{R_2} = \frac{\lambda_1 N_1}{\lambda_2 N_2} = \frac{\frac{N_1}{T_1}}{\frac{N_2}{T_2}} = \frac{N_1 T_2}{N_2 T_1}$	1	
24	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Definition of wavefront ½ mark</p> <p>Figure ½ mark</p> <p>Derivation of law of refraction 1 mark</p> </div> <p>Wavefront is defined as the surface of constant phase; Alternatively It is a locus of all the points in the same phase of disturbance</p> <div style="text-align: center; margin: 10px 0;">  </div> $\sin i = \frac{BC}{AC} = \frac{v_1 t}{AC}$ $\sin r = \frac{AE}{AC} = \frac{v_2 t}{AC}$ $\frac{\sin i}{\sin r} = \frac{v_1}{v_2}$ <p style="text-align: center;">OR</p>	½	2

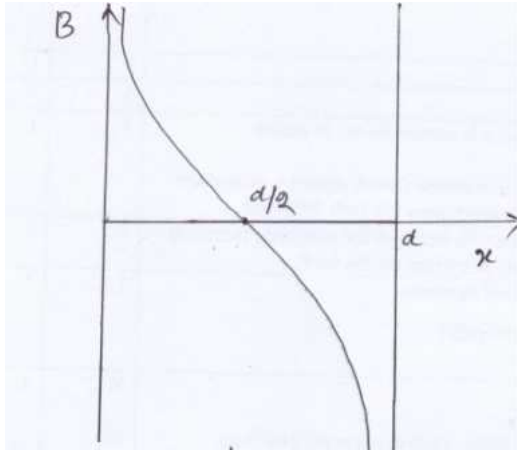	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Lens Maker's formula 1 mark</p> <p>Derivation of focal length of three lenses 1 mark</p> </div> $\therefore \frac{1}{v} - \frac{1}{u} = (n - 1) \left(\frac{1}{R_1} - \frac{1}{R_2} \right) \text{-----1}$ <p>When $u = \infty$ and $v = f$</p> $\frac{1}{f} = (n - 1) \left(\frac{1}{R_1} - \frac{1}{R_2} \right) \text{-----2}$ $\left[n = \frac{n_2}{n_1} \right]$ <p>From Eq 1 and 2</p> $\frac{1}{f} = \frac{1}{v} - \frac{1}{u} \text{ then lens formula}$ <p>[Even if the student derives $\frac{1}{f} = \frac{1}{v} - \frac{1}{u}$ for biconvex lens, award 1 ½ marks]</p>	<p>1</p> <p>½</p> <p>½</p>	<p>2</p>
<p>25</p>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>Magnetic field at point P 1 ½ mark</p> <p>Curve ½ mark</p> </div> <p>a)</p> $B = \frac{\mu_0 I}{2\pi x}$ $B_p = B_1 - B_2 = \frac{\mu_0 I}{2\pi x} - \frac{\mu_0 I}{2\pi(d-x)} = \frac{\mu_0 I(d-2x)}{2\pi(d-x)x}$ <p>b)</p> 	<p>½</p> <p>1</p> <p>½</p>	<p>2</p>

Electrostatic force = centripetal force ½ mark

Angular momentum = $\frac{nh}{2\pi}$ ½ mark

Formula for radius of nth orbit 1 mark

$$F_c = F_E$$

$$\frac{m_e v_n^2}{r_n} = \frac{Kze^2}{r_n^2}$$

$$m_e v_n^2 r_n = Kze^2$$

By Bohr's second postulate

$$L = m_e v_n r_n = \frac{nh}{2\pi}$$

$$r_n = \frac{n^2 h^2}{4\pi^2 m_e k e^2 Z}$$

$$r_n = \frac{n^2 h^2}{4\pi^2 m_e k e^2} (\because Z = 1)$$

OR

Two observations 1 mark

Diagram 1 mark


a)

(i) There exists a threshold frequency below which no photoelectron is ejected.

(ii) KE of electron depends linearly on frequency and is independent of intensity of radiation.

[or any other correct observation]

b)

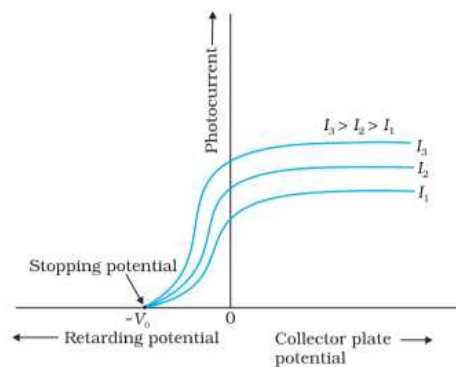




[only curve is essential to draw]

27	Explanation of depletion layer and potential barrier	$\frac{1}{2} + \frac{1}{2}$ mark	
	Effect on depletion layer	$\frac{1}{2}$ mark	
	Effect on Potential barrier	$\frac{1}{2}$ mark	
	The small region in the vicinity of the junction which is depleted of free charge carrier and has only immobile ions is called depletion region/ layer.	$\frac{1}{2}$	
	The accumulation of negative charges in p - region and positive charges in n- region set up a potential difference across the junction, which acts as a barrier and is called barrier potential.	$\frac{1}{2}$	
	In forward bias (a) width of depletion layer decreases	$\frac{1}{2}$	
	(b) value of potential decreases	$\frac{1}{2}$	2



SECTION C

28	a) Internal resistance	1 $\frac{1}{2}$ mark	
	b) Voltage across R	1 $\frac{1}{2}$ mark	
	(a)		
	Current drawn from cell -1		
		$I_1 = \frac{E_1 - V}{r_1}$	$\frac{1}{2}$
	Current drawn from cell -2		
		$I_2 = \frac{E_2 - V}{r_2}$	
	Resultant current	$I = I_1 + I_2$	
	On solving		
	$\therefore I = \frac{E_1 r_2 + E_2 r_1}{r_1 r_2} - V \left(\frac{r_2 + r_1}{r_1 r_2} \right)$		
	$\therefore V = \frac{E_1 r_2 + E_2 r_1}{r_1 r_2} - I \left(\frac{r_1 r_2}{r_2 + r_1} \right)$		
	$V = E_{eq} - I r_{eq}$		
	$E_{eq} = \frac{E_1 r_2 + E_2 r_1}{r_1 + r_2}$	$\frac{1}{2}$	
	$r_{eq} = \frac{r_1 r_2}{r_2 + r_1}$	$\frac{1}{2}$	

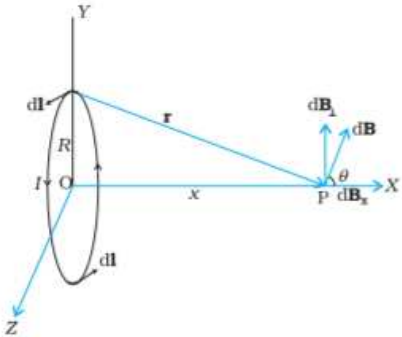	$r_{eff} = \frac{r_1 r_2}{r_1 + r_2} = \frac{2 \times 2}{2 + 2} = 1\Omega$ <p>Current through R</p> $I = \frac{E_{effect}}{R + r_{eff}} = \frac{5}{10 + 1} = \frac{5}{11} A$ <p>P.D across R</p> $= \frac{5}{11} \times 10 = 4.54 \text{ volt}$	1/2	
		1/2	
		1/2	3
29	<div style="border: 1px solid black; padding: 5px;"> <p>a) Writing expression for magnetic moment 1/2 mark</p> <p>b) Figure 1/2 mark</p> <p>Magnetic field and calculation 2 mark</p> </div> <p>(a) magnetic moment = $M = NIA$ $M = NI\pi r^2$</p>  <p>According to Biot-sevart law</p> $\vec{dB} = \frac{\mu_0 I}{4\pi} \frac{ \vec{dl} \times \vec{r} }{r^3}$ $dB = \frac{\mu_0 I dl}{4\pi r^2}$ <p>dB_{\perp} components due to diametrically opposite components cancel out. Only dB_x components refrain</p> $dB_x = \frac{\mu_0 I dl}{4\pi r^2} \cdot \cos\theta$ $B = \int dB_x$ $B = \frac{\mu_0 IR^2}{2(R^2 + x^2)^{3/2}} \text{ (along } x \text{ axis)}$	1/2	
		1/2	
		1/2	3

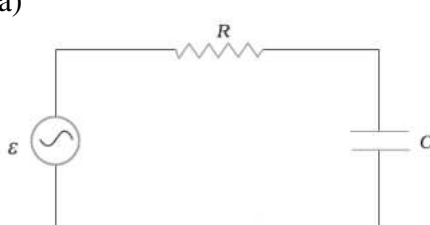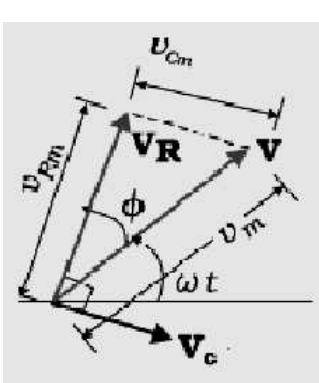	<p style="text-align: center;">OR</p> <div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>a) Definition and expression 1 mark</p> <p>b) Conversion of Galvanometer</p> <p style="padding-left: 20px;">(i) into ammeter 1 mark</p> <p style="padding-left: 20px;">(ii) Effective resistance 1 mark</p> </div> <p>a) Deflection per unit current</p> $I_s = \frac{\theta}{I} = \frac{BNA}{K}$ <p>b) (i) By connecting a low resistance (R_s) in parallel to galvanometer such that</p> $(I_0 - I_g)R_s = I_g G$ <p>(ii) effective resistance</p> $\frac{1}{R_A} = \frac{1}{R_s} + \frac{1}{G} = \frac{G + R_s}{R_s G}$ $\therefore R_A = \frac{R_s G}{G + R_s}$	<p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">1</p>	<p style="text-align: center;">3</p>
<p>30</p>	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>(a) Peak value of current and phasor 1 mark</p> <p>Potential across R $\frac{1}{2}$ mark</p> <p>Potential across C $\frac{1}{2}$ mark</p> <p>(b) Phase difference $\frac{1}{2}$ mark</p> <p>Identification $\frac{1}{2}$ mark</p> </div> <p>(a)</p>  	<p style="text-align: center;">$\frac{1}{2}$</p>	


	<p>Peak value of current</p> $I_0 = \frac{V_0}{Z} = \frac{V_0}{\sqrt{X_c^2 + R^2}}$ $X_c = \frac{1}{\omega C}$ <p>(i) $V_R = I_0 R = \frac{V_0 R}{\sqrt{X_c^2 + R^2}}$</p> <p>(ii) $V_c = I_0 X_c = \left(\frac{V_0}{\sqrt{X_c^2 + R^2}} \right) X_c$</p> <p>(b) From phasor</p> $\tan \phi = \frac{X_c}{R}$ <p>Current leads the applied voltage by phase ϕ</p>	<p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p>	3
31	<div style="border: 1px solid black; padding: 5px;"> <p>a) Dependence on distance D from slit 1 mark</p> <p>b) Dependence on slit separation d 1 mark</p> <p>c) Dependence on distance between source and slit 1 mark</p> </div> <p>(a) Fringe width increases, $\beta \propto D$</p> <p>(b) Fringe width decreases, $\beta \propto \frac{1}{d}$</p> <p>(c) Fringes disappear because $\frac{s}{s} < \frac{\lambda}{a}$ not satisfied</p>	<p>1/2 + 1/2</p> <p>1/2 + 1/2</p> <p>1/2 + 1/2</p>	3
32	<div style="border: 1px solid black; padding: 5px;"> <p>(a) Speed of light in material medium 1 mark</p> <p>(b) (i) Identification and Range 1/2 + 1/2 mark</p> <p>(ii) Identification and Range 1/2 + 1/2 mark</p> </div> <p>(a) Speed of light in medium</p> $v = \frac{1}{\sqrt{\mu\epsilon}} = \frac{1}{\sqrt{\mu_0 \mu_r \epsilon_0 \epsilon_r}}$ <p>(b) (i) Microwave range 0.1m – 1mm ($10^{-3}\text{m} - 10^{-1}\text{m}$)</p> <p>(ii) Infrared waves range 1 mm – 700nm</p>	<p>1</p> <p>1/2 + 1/2</p> <p>1/2 + 1/2</p>	3
33	<div style="border: 1px solid black; padding: 5px;"> <p>KE of α particle 1 mark</p> <p>Calculation 2 marks</p> </div> <p>KE of α particle</p> $E_{k\alpha} = (m_y - m_x - m_\alpha)c^2$ $= m_y c^2 - m_x c^2 - m_\alpha c^2$ $= (235 \times 7.8 - 231 \times 7.835 - 4 \times 7.07) \text{ MeV}$ $= 1833 - 1809.885 - 28.28$ $= 1833 - 1838.165 = -5.165 \text{ MeV}$	<p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1</p>	3

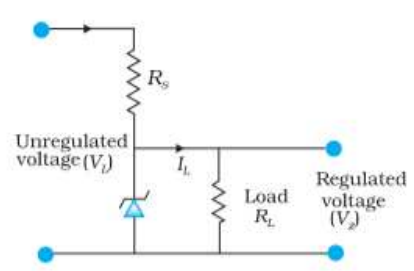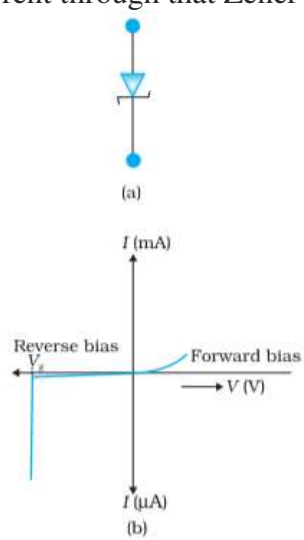	$E_k < 0$ wrong information [Award full marks till this step]		
34	<div style="border: 1px solid black; padding: 5px;"> <p>(a) Circuit diagram 1 mark</p> <p>Working of Zener diode as DC voltage regulator 1 mark</p> <p>V-I graph $\frac{1}{2}$ mark</p> <p>(b) Reason of heavy doping $\frac{1}{2}$ mark</p> </div> <p>(a)</p>  <p>If the input voltage increases, the current through R_s and Zener diode also increases. This increases the voltage drop across R_s without any changes in the voltage across the Zener diode. This is because in the breakdown region, Zener voltage remains constant even though the current through that Zener diode changes.</p>  <p>(b) To decrease the width of depletion region which increases electric field at the junction.</p>	1	1
		$\frac{1}{2}$	$\frac{1}{2}$
		$\frac{1}{2}$	3

SECTION D

35	<div style="border: 1px solid black; padding: 5px;"> <p>(a) (i) Electric Field inside hollow sphere $1\frac{1}{2}$ mark</p> <p>(ii) Electric Field outside hollow sphere $1\frac{1}{2}$ mark</p> <p>(b) (i) The net outward flux through cylinder 1 mark</p> <p>(ii) The net charge present inside the cylinder 1 mark</p> </div>		
----	---	--	--

(a)
(i)



1/2

According to Gauss's Law

$$\oint \vec{E} \cdot d\vec{A} = \frac{q_{in}}{\epsilon_0}$$

1/2

\therefore inside hollow sphere


$$q_{in} = 0$$

$$\therefore \oint \vec{E} \cdot d\vec{A} = 0$$

$$E = 0$$

1/2

(ii)



1/2

$$q = \sigma 4\pi R^2$$

$$\oint \vec{E} \cdot d\vec{A} = \frac{q}{\epsilon_0}$$

1/2


$$E \oint dA = \frac{q}{\epsilon_0}$$

$$E \cdot 4\pi x^2 = \frac{\sigma 4\pi R^2}{\epsilon_0}$$

$$E = \frac{\sigma R^2}{\epsilon_0 x}$$

1/2

b)

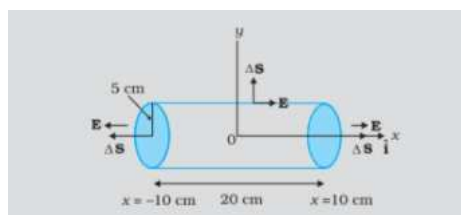

(i) The net outward flux through cylinder

$$\phi = EA + EA = 2EA \quad A = \pi r^2$$

1/2

$$= 2 \times 200 \times 3.14 \times 0.05 \times 0.05$$

$$= 3.14 \frac{N}{C} m^2$$

1/2

(ii) The net charge present inside the cylinder

$$q = \epsilon_0 \phi$$

1/2

$$q = 8.854 \times 3.14 \times 10^{-12}$$

$$= 2.78 \times 10^{-11} \text{ C}$$

1/2

5

OR

- | | |
|---|---------|
| a) Expression for potential energy | 3 marks |
| b) Equipotential surface due to isolated -ve charge | 1 mark |
| c) Work done in assembling the charge | 1 mark |

(a) Work done in bringing q from infinity against the field
 $E = q_1 V / |\vec{r}_1|$

1

Work done on q_2 against the field $E = q_2 V / |\vec{r}_2|$

Work done on q_2 against the field due to q_1

$$= \frac{q_1 q_2}{4\pi\epsilon_0 (r_{12})}$$

1


Potential energy of the system = Total work done in assembling the system

1/2

$$= q_1 V(\vec{r}_1) + q_2 V(\vec{r}_2) + \frac{q_1 q_2}{4\pi\epsilon_0 r_{12}}$$

1/2

b)



1

c) Work done = charge in potential energy

$$= \frac{kq_1q_2}{r_{12}} + \frac{kq_1q_3}{r_{13}} + \frac{kq_2q_{31}}{r_{23}}$$

1/2

$$= \frac{9 \times 10^9 \times 10^{-12}}{0.1} [1 \times -1 + -1 \times 2 + 1 \times 2]$$


$$= 9 \times 10^{-2} [-1 - 2 + 2]$$

$$= -9 \times 10^{-2} J$$

1/2

5

a) Labelled diagram	1 mark
Derivation for torque	1 mark
Justification of radial magnetic field	1 marks
(b) Calculation of radius of the path	2 marks



Magnetic forces of AB and CD are equal and opposite and have different line of action so constitute torque

Force acting on current carrying arms AB and CD

$$F_1 = F_2 = BIl = F \text{ (say)}$$

$\therefore \tau = F \times \text{perpendicular distance between two force arm}$

$$\therefore \tau = BIl \sin\theta$$

$$lb = A$$

$$\tau = BIA \sin\theta$$

For N turn

$$\tau = BINA \sin\theta$$

Radial fields always produce maximum torque and removes the dependence of torque on θ

(b) Radius of circular path $= \frac{mv}{Bq} = \frac{\sqrt{2mE_k}}{Bq}$

$$= \frac{1}{B} \sqrt{\frac{2mqV}{q^2}}$$

$$= \frac{1}{B} \sqrt{\frac{2mV}{q}} = \frac{1}{2 \times 10^{-3}}$$

$$r = 10\text{m}$$

OR

(a) Labelled diagram	1 mark
Working	1 mark
(i) & (ii) Reason/justification	$\frac{1}{2} + \frac{1}{2}$ mark
(b) (i) External force required	1 mark
(ii) Power required	1 mark

1

$\frac{1}{2}$


$\frac{1}{2}$

1

1

1

5

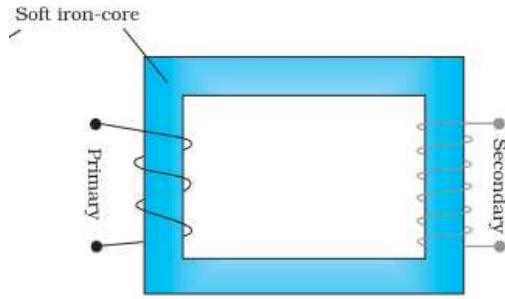

1

[Note: Diagram with different windings can also be drawn]
 When an alternating voltage is applied to the primary, the resulting current produces an alternating magnetic flux which links the secondary and induces an emf

Induced emf across primary coil

$$e_p = -N_p \frac{d\phi}{dt}$$

1/2

Induced emf across secondary coil

$$e_s = -N_s \frac{d\phi}{dt}$$

$$\frac{e_s}{e_p} = \frac{N_s}{N_p} = r$$

1/2

(i) to minimise the eddy currents

1/2

(ii) To reduce the heat loss

1/2

(b)

(i)

$$\begin{aligned}
 F &= BIl \\
 I &= \frac{E}{R} = \frac{Bvl}{R} \\
 F &= \frac{B^2vl^2}{R} \\
 &= \frac{0.4 \times 0.4 \times 0.1 \times 0.2 \times 0.2}{0.1} \\
 &= 6.4 \times 10^{-3} \text{ N}
 \end{aligned}$$

1/2

1/2

$$\begin{aligned}
 P &= F.v = 6.4 \times 10^{-3} \times 0.1 \\
 &= .64 \times 10^{-3} \text{ W}
 \end{aligned}$$

1/2

1/2

5

a) Labelled diagram 2 marks


Figure

Expression for resolving power 1 mark

b) Calculation of angular magnification 1 mark

Diameter of image formed by objective lens 1 mark

a)

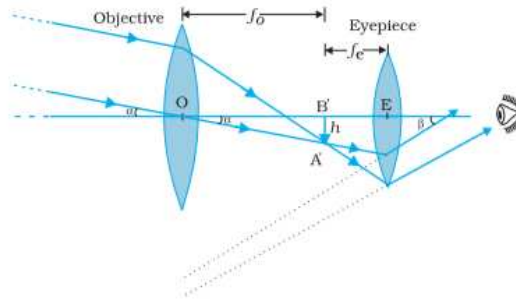

Resolving power of telescope = $\frac{D}{1.22\lambda}$

b) (i) Angular magnification $m = \frac{\beta}{\alpha} = \frac{f_o}{f_e} = \frac{20m}{10^{-2}m} = 2000$

(ii)

$$\frac{D}{d} = \frac{x}{f_o}$$

$$d = \frac{Df_o}{x} = \frac{3.5 \times 10^6 \times 20}{3.8 \times 10^8} = .18m$$


OR

(a) Labelled diagram 1 mark

Derivation of mirror relation 2 marks

(b) Position of image 1 ½ marks

Nature of image 1 ½ marks

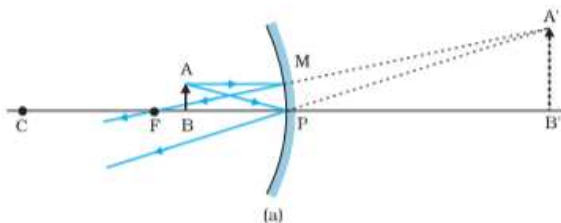

$\Delta ABP \sim \Delta A'B'P$

$$\frac{A'B'}{AB} = \frac{PB'}{PB} \dots \dots \dots 1$$

Also $\Delta A'B'F \sim \Delta MNP$ (for small curvature)

2

1

1

½

½

5

1

½

$\therefore \frac{A'B'}{MP} = \frac{B'F}{PF}$ $\frac{A'B'}{AB} = \frac{B'F}{PF} \text{-----} 2$		
<p>From 1 and 2</p> $\frac{PB'}{PB} = \frac{B'F}{PF} \text{-----} 3$	1/2	
$\frac{PB'}{PB} = \frac{B'P + PF}{PF} \text{-----} 4$ <p>$PB = -u$ $PB' = v$ $PF = -f$</p>	1/2	
$\frac{v}{-u} = \frac{v - f}{-f}$ $-vf = -vu + uf$ $\frac{1}{f} = \frac{1}{v} + \frac{1}{u}$	1/2	
<p>(b) According to lens maker's formula</p>		
$\frac{1}{f} = (\mu - 1) \left(\frac{1}{R_1} - \frac{1}{R_2} \right)$ <p>for plano convex lens $R_1 \rightarrow R$ and $R_2 \rightarrow \infty$</p>	1/2	
$\frac{1}{f} = \frac{(\mu - 1)}{R} = \frac{1.5 - 1}{20}$	1/2	
<p>$\therefore f = 40 \text{ cm}$</p> $\frac{1}{f} = \frac{1}{v} - \frac{1}{u}$ $\frac{1}{40} = \frac{1}{v} - \frac{1}{-30}$		
<p>$v = -12 \text{ cm}$ Nature: virtual</p>	1/2	5